




LEGEND SIGNOS CONVENCIONALES. On this map a lane is considered as being a minimum of 2.5 meters in width. En este mapa se considera que una vía tenga un ancho mínimo de 2.5 metros. Includes categories for Roads, Railroads, Boundaries, and other features with their respective symbols.

GLOSSARY GLOSARIO. A list of geographical features and their corresponding symbols used on the map, such as Caño, Castillo, Cem., etc.


E751, EDITION 1-AMS
Prepared by the Army Map Service (PV), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1966 from Nicaragua, 1:50,000, Dirección General de Cartografía, Sheet 3349 III, printed 1966.

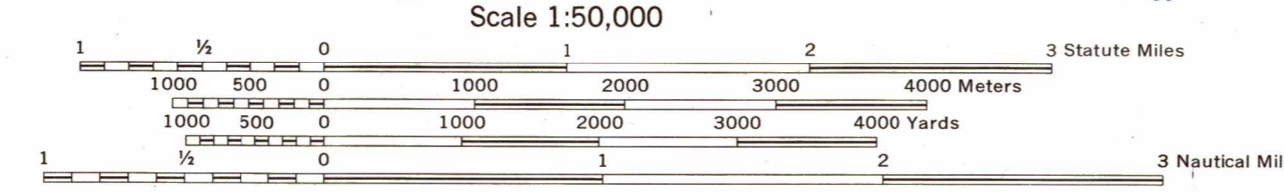

GRID CONVERSION... TO CONVERT A MAGNETIC AZIMUTH TO A GRID AZIMUTH... TO CONVERT A GRID AZIMUTH TO A MAGNETIC AZIMUTH...

CONTOUR INTERVAL 20 METERS... INTERVALO DE CURVAS DE NIVEL A 20 METROS... TRANSVERSE MERCATOR PROJECTION... HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM

BLACK NUMBERED LINES INDICATE THE 1,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID... LAS LÍNEAS NEGRAS NUMERADAS INDICAN EL CUADRICULADO DE MIL METROS DE LA PROYECCIÓN UNIVERSAL TRANSVERSAL DE MERCATOR...

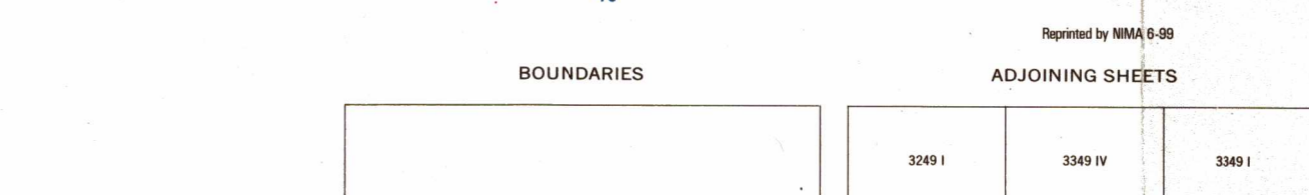

BOUNDARIES... ADJOINING SHEETS... GRID ZONE DESIGNATION... TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS...

LIMITED DISTRIBUTION... Distribution authorized to DOD, LAW 10 U.S.C. 5833 & 455. Release authorized to U.S. DOD contractors IAW 48 C.F.R. 5252.245-7000. Refers other requests to Headquarters, NMMA, ATTN: Release Officer, Step P-25. Destruir on 'For Official Use Only.' Removal of this caveat is prohibited.